


Pannelli parete per magazzini frigoriferi in poliuretano


Wall panels for refrigerated warehouse with polyurethane insulation

Wandpaneel für Kühlhallen, isoliert mit PU-Hartschaum

Panneaux de bardage pour entrepôts frigorifiques avec isolation en mousse polyuréthane

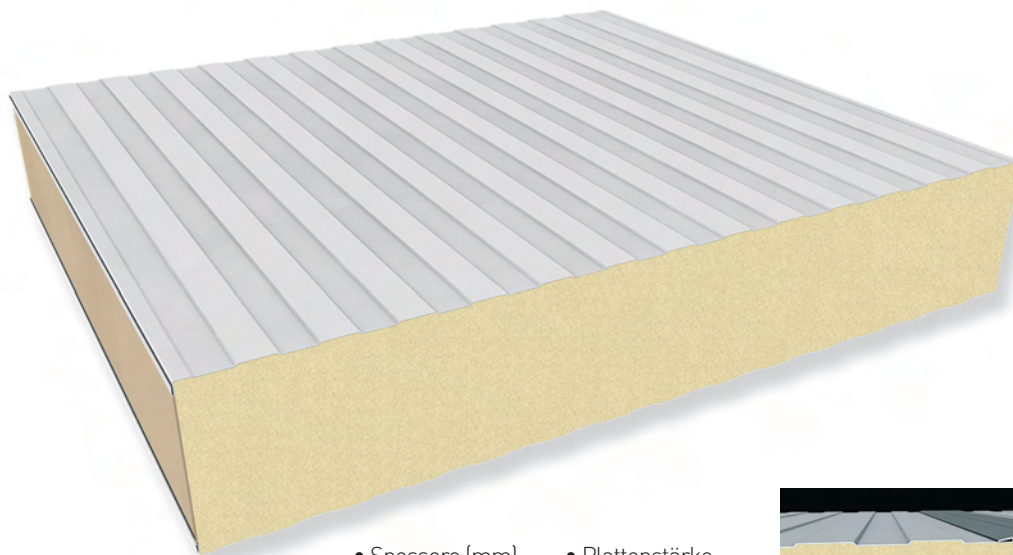


PARTICOLARE DEL GIUNTO

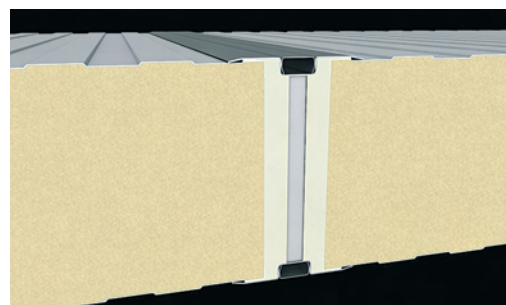

Dogato/Liscio

- Spessore (mm)
- Thickness
- Plattenstärke
- Epaisseur

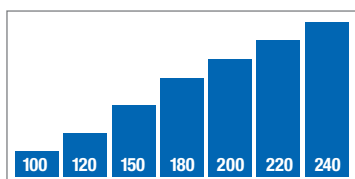

Spessore Pannello (mm)	Trasmittanza Termica in Accordo UNI EN 14509 A.10 U (W/m ² K)	Coefficiente di Trasmissione Termica Medio Iniziale in Accordo EN ISO 6946 K (W/m ² K)
100	0,22	0,21
120	0,19	0,17
150	0,15	0,14
180	0,13	0,12
200	0,11	0,11
220	0,10	0,10
240	0,09	0,09

DISEGNO TECNICO JUMBO TIPO GSQ

